



МАРТ

E-MART
ВАШ ПОСТАВЩИК
HIKVISION

<https://emart.su/brands/hikvision/>

Федеральный
Санкт-петербург
Москва
Краснодар

8 800 511-77-41
8 812 426-99-66
8 495 137-99-67
8 861 205-62-66

www.emart.su

mail@emart.su


产品图片



技术参数 (单位mm)

- 外形尺寸: 长90x宽35x厚28(mm)
- 输入电压: DC12V
- 工作电流: 待机40mA,动作70mA
- 电气性能: 1A@30VDC
- 接点输出: NO\NC\COM接点
- 面板材质: 304不锈钢面板
- 耐用测试: 一百万次老化测试合格
- 适用类型: 适用各种窄门框
- 适用温度: $-20\sim+55^{\circ}\text{C}$
- 适用湿度: 0~95%(相对湿度)
- 最大感应距离: 5~20cm(可调)
- LED指示灯状态:
 - 圆形指示灯呈红色: 待机状态
 - 圆形指示灯呈绿色: 动作状态
- 产品重量: 0.14kg

安装及尺寸图

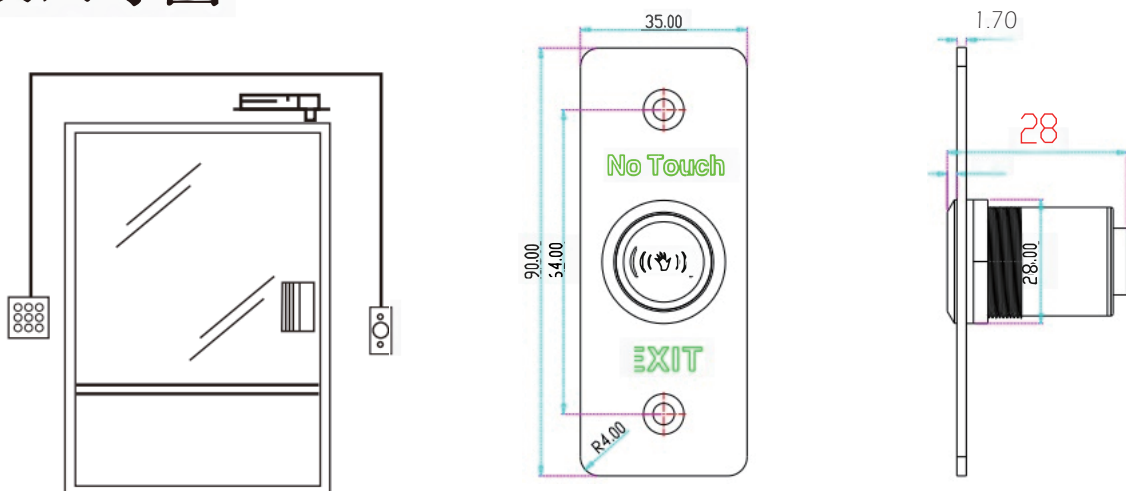


接线图

开关延时时间:0.3S-30S

T电位器状态说明:

往左旋转延时变短(逆时针)

往右旋转延时变长(顺时针)




最大感应距离:5-20cm可调

D电位器状态说明:

往左旋转感应距离变短(逆时针)

往右旋转感应距离变长(顺时针)






Product Image



Specification

- Size: 90Lx35Wx28H(mm)
 - Input : DC12V
 - Contact rating: 1A@30VDC
 - Output contact: NO\NC\COM
 - Mechanical life: 1,000,000 tests
 - Suitable for door: Hollow Door
 - Detection range: 5-20cm(Adjustable)
 - Time delay: 1~25s(Adjustable)
 - Current: Standby 40mA, Action 70mA
 - Operating temp: -20°C ~+55°C (-4-131°F)
 - Suitable humidity: 0-95% (relative humidity)
- LED Indicator:
- Red LED indicator: Power ON(standby)
 - Green LED indicator: Power ON(sensation)
- Material: 304Stainless
 - Weight: 0.14 kg

Installation & Size

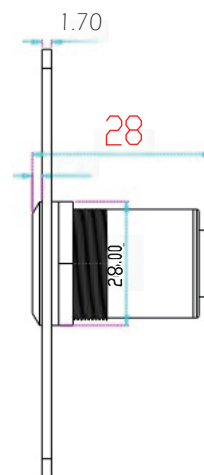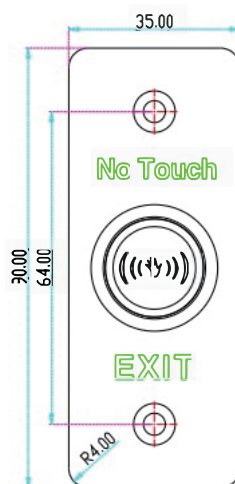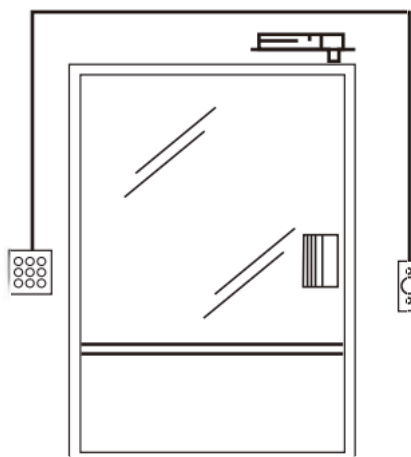

Installation



Time Delay:0.3S-30S



Turn left short



Turn right long



Detection range:5-20cm(Adjustable)



Turn left near



Turn right far